

How to Remove the Canopy Hood

STEP 1



The canopy hood is held together onto the glass aquarium via (2) hinges located on the rear portion of the tank.

Push the canopy hood forward towards the front of the tank . Each side of the canopy will unlock from the aquarium tank molding

STEP 2



Remove the canopy from the glass aquarium

How to Remove the Pump

STEP 3



Pull out the black rubber gasket that contains the powercord for the pump.

STEP 4



Unplug the 90 degree elbow that is connected to the back wall of the aquarium.

STEP 5



Remove the pump by pulling up on the powercord.

How to Install a New Electronic Ballast

STEP 6



Unscrew Splash Guard Lens from the Canopy Hood. You will need a Phillips Screwdriver to remove the (4) screws.

STEP 7



Remove the Splash Guard Lens.

STEP 8



Slide out the light bulb from the clip holders.

STEP 9



Pull out the (4) connection wires from the male pins of the bulb.

STEP 10



Unscrew the (2) screws that hold the bulb clips to the reflector.

STEP 11




Remove reflector and slide out the (4) connection wires through the opening.

STEP 12




Unscrew the (2) screws located on each end of the ballast.

STEP 13

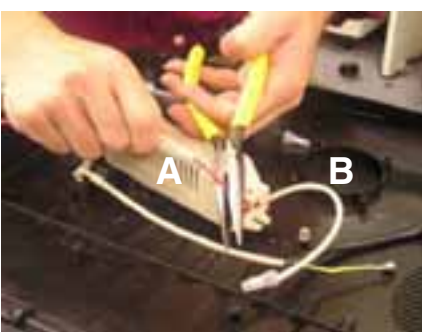

Cut wire(A) that is connected to the switch and re-connect to the replacement ballast with the supplied wire nut.

STEP 14

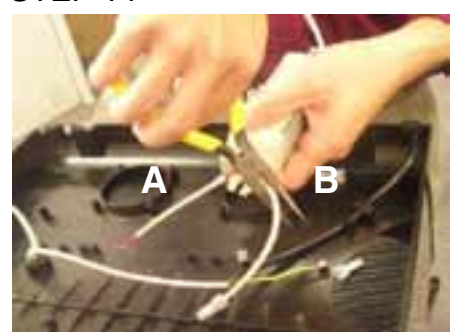

Cut wire (B) that is connected to the black powercord and re-connect to the replacement ballast with the supplied wire nut.

* For Additional assistance please call or email us.
Email: sales@bjlighting.com
Tel: (310) 672-4099 or (310) 672-4021
Web: www.bjlighting.com